


HIGH VOLTAGE METAL GLAZE RESISTORS


Series : MVR

Features:

- Metal Glaze technology
- High pulse loading capability
- Miniature size
- Complaint to **RoHS** Directive 2002/95/EC
- A metal glazed film is deposited on a high grade ceramic body. After a helical groove has been cut in the resistive layer, tinned electrolytic copper wires are welded & coated with lacquer which provides electrical, mechanical and climatic protection.

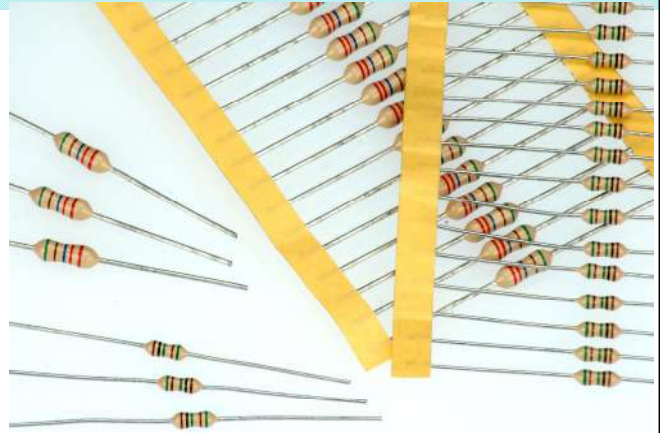

Construction :

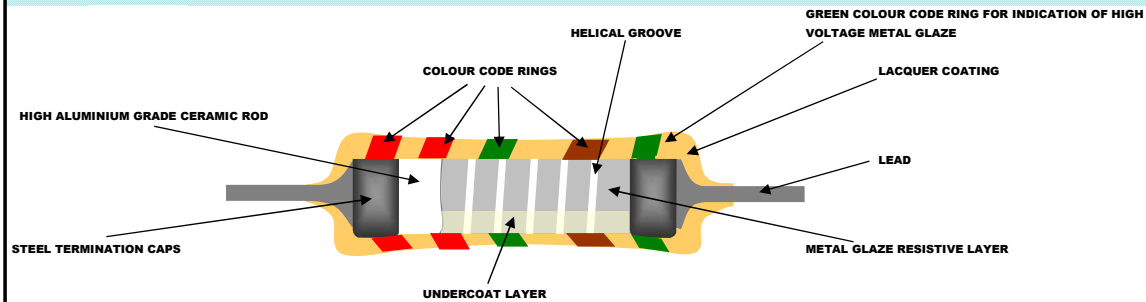


Technical specification:

DESCRIPTION	SERIES		
	MVR25	MVR37	MVR68
Resistance range*	100KΩ ~ 22MΩ	100KΩ ~ 33MΩ	100KΩ ~ 68MΩ
Resistance tolerance	±1%, E24/E96 series; ±5%, E24 series		
Temperature coefficient	≤ 200 ppm/°C		
Maximum dissipation @ 70°C	0.25W	0.5W	1W
Dielectric Withstanding voltage	500 V	750V	750V
Max. permissible voltage			
DC	1600 V	3500 V	10000 V
RMS	1150 V	2500 V	7000 V
Thermal resistance	140 K/W	120 K/W	70 K/W
Climatic category	55/155/56		
Stability, R max.			
Load	Δ R±(1.5% +0.10Ω)		
Climatic test	Δ R±(1.5% +0.10Ω)		
Soldering	Δ R±(0.5% +0.05Ω)		
Short time overload	Δ R±(2.0% +0.10Ω)		
* Note : Higher ohmic value other than resistance range are available on request			

MFR reserves the right to make changes in product specification without notice or liability.

All information is subject to MFR's own data & is considered accurate at the time of going to print.

Dimensions :

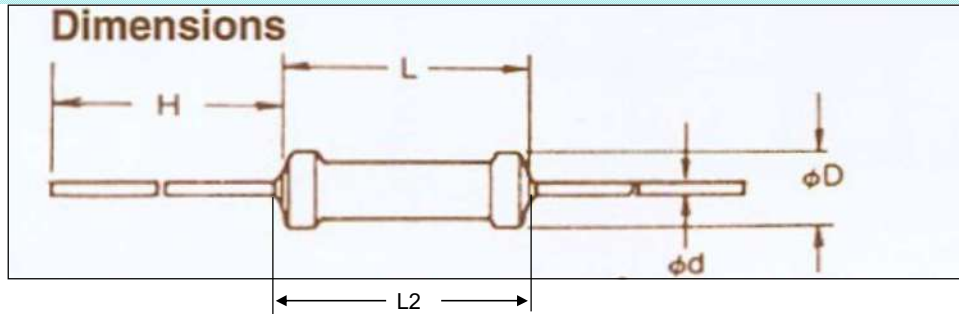

Physical Data:

1.0 GENERAL SERIES SPECIFICATION :

TYPE	WATT. @ 70°C	TOL.	TCR PPM/°C	DIMENSIONS (mm)					RESISTANCE RANGE	MAX. PERMISSIBLE VOLTAGE	
				L	L2	D	d ± 0.05	H		DC	RMS
MVR25	0.25W	±1%, ±5%	≤ ±200	6.5 ±0.5	8.5 MAX.	2.5 ±0.5	0.6	28 min	100 kΩ ~ 22MΩ	1600V	1150 V
MVR37	0.5W	±1%, ±5%	≤ ±200	10 ±1	12.0 MAX.	3.9 ±0.5	0.8	25 min	100 kΩ ~ 33MΩ	3500V	2500 V
MVR68	1W	±1%, ±5%	≤ ±200	18 ±1	20.0 MAX.	6.0 ±0.5	0.8	24 min	100 kΩ ~ 68MΩ	10000V	7000 V

Note : Working voltage is $\sqrt{P \times R}$ where P is power & R is resistance in Ohms

Mass Per Unit :

TYPE	MASS (g)
MVR25	22 g
MVR37	46 g
MVR68	169 g

Marking:

The MVR25, MVR37 & MVR68 type the nominal resistance & tolerance are marked on the resistor body using five coloured bands. Fifth band (**green color**) stands for high voltage resistor.

Material Specifications:

Element : Metal glaze film

Core : Fire cleaned high purity ceramic


End caps : Steel caps

Coating : lacquer coating

Standard Terminals : Solderable - tinplated copper

Part Numbering Information:

Part Number : Type number, power rating, resistance value, tolerance, tcr.

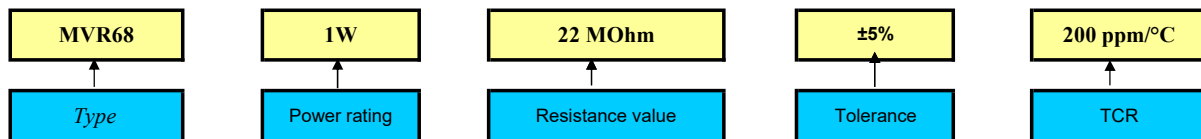

Examples: PART NO. : MVR68, 1W, 22 MOhm, ±5%, 200ppm/°C


Packing Information:

TYPE	Pcs Per Poly Bag/ Blue box	Pcs Per Brown Box
MVR25	1,000	5,000
MVR37	---	1,000
MVR68	---	500


Performance Data (Procedure & Requirements):

TEST	PROCEDURE	REQUIREMENTS
Robustness Of Termination 1. Tensile Test 2. Bend Test 3. Torsion Test	Load 10 N for 10 sec. Load 5 N 90° , 180°, 90° 3 X 360° in opposite directions	No visual damage No visual damage No visual damage $\Delta R/R$ max.: $\pm(0.50\% + 0.05 \Omega)$
Solderability Test	16 hrs steam or 16 hrs. at 155°C 2 sec. ± 0.5 sec. in solder at 235° $\pm 5^\circ\text{C}$ Using flux	>95% coverage covered (good tinning) & no damage
Resistance To Soldering Heat	at 350°C for 3 sec., 2.5mm from the body	$\Delta R/R$ max.: $\pm(0.5\% + 0.05 \Omega)$
Temperature Cycling	30 minutes at -55°C & 30 minutes at 150°C Total 5 number of cycles.	No visual damage $\Delta R/R$ max.: $\pm(0.5\% + 0.05 \Omega)$
Dry Heat Test	16 hrs at 150°C	$\Delta R/R$ max.: $\pm(1.5\% + 0.05 \Omega)$
Cold Test	2 hrs at -55°C	$\Delta R/R$ max.: $\pm(0.50\% + 0.05 \Omega)$
Short Time Overload	6.25 X Power nominal for 5 sec.ON & 45 sec. OFF; 10 Cycles @ 25°C. Voltage not more than 2 X limiting voltage.	$\Delta R/R$ max.: $\pm(2.0 + 0.05 \Omega)$
Endurance @ 70°C	2000 hrs. load with Pn (power nominal) 1.5 hr. ON & 0.5 hr. OFF	No visual damage $\Delta R/R$ max.: $\pm(1.5\% + 0.1 \Omega)$
Endurance @ Upper Category Temperature	1000 hrs. at 150°C with no load	No visual damage $\Delta R/R$ max.: $\pm(1.5\% + 0.1 \Omega)$
Temperature Rise Test	Horizontally mounted, loaded with Pn	Hot spot temperature less than maximum body temperature
Damp Heat Steady State	56 days, 40°C; 90 to 95% Rh; dissipation $\leq 0.01Pn$	No visual damage $\Delta R/R$ max.: $\pm(1.5\% + 0.1 \Omega)$
Temperature Coefficient	At 25/-55/25 °C & 25/150/25 °C	Within specified limits
Insulation Resistance	V- Block method for 1 minute duration At 500 V dc	> 10 ³ M Ω
Voltage Proof Test	V- Block method for 1 minute duration At 500 V	No flash over or break down should observed
Pulse Load	---	See pulse load capabilities graphs


Derating Curve:

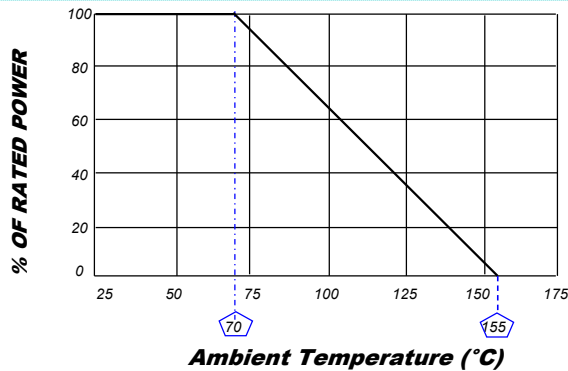


Pulse load capabilities:

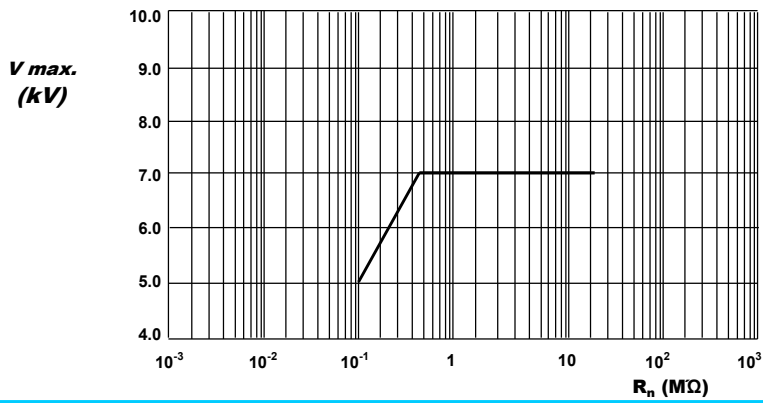

MVR25 Maximum peak pulse voltage (V_{max}) in accordance with "IEC 60065" '1.2 / 50 μ s from a 1 nF capacitor charged. 12 pulse/min.

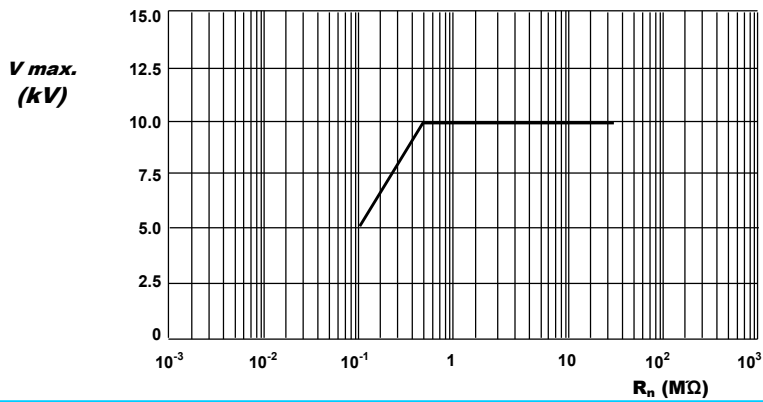

MVR37 Maximum peak pulse voltage (V_{max}) in accordance with "IEC 60065" '1.2 / 50 μ s from a 1 nF capacitor charged. 12 pulse/min.

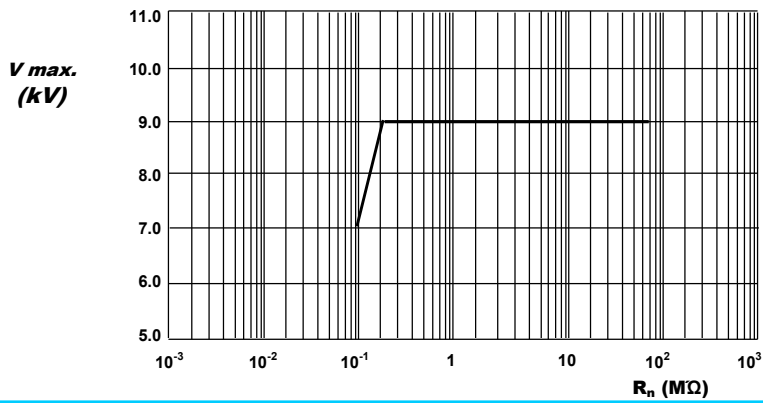

MVR68 Maximum peak pulse voltage (V_{max}) in accordance with "IEC 60065" '1.2 / 50 μ s from a 1 nF capacitor charged. 12 pulse/min.

MFR reserves the right to make changes in product specification without notice or liability.

All information is subject to MFR's own data & is considered accurate at the time of going to print.

Document no. : MVR07

Page : 4 of 4

Revision no. : 230828