

## POWER METAL FILM RESISTORS


**Series :**     **MPR**

**Features:**

- High Power in small packages.
- Different lead materials for different applications
- Defined interruption behavior
- Lead (Pb)-free solder contacts
- Pure tin plating provides compatibility
- With lead (Pb)-free and lead containing soldering
- **RoHS** Compliant directive 2002/95/EC
- Red nonflammable lacquer



**Construction :**

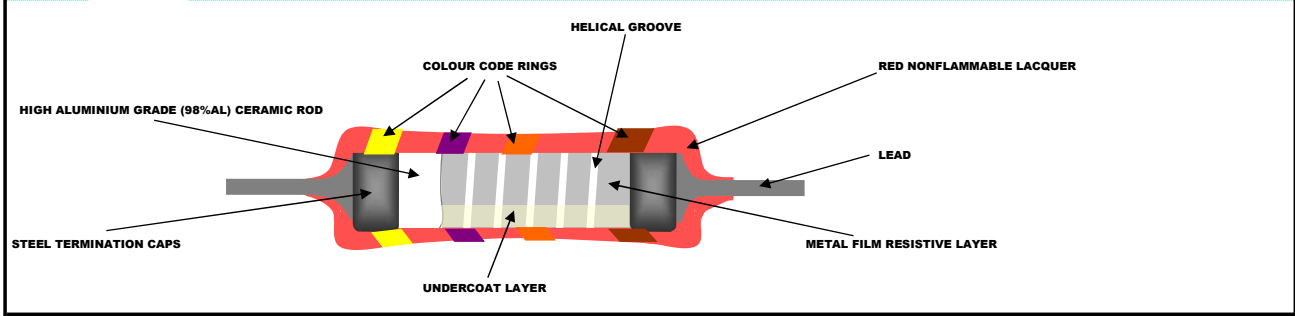


**Technical specification:**

DESCRIPTION	SERIES		
	MPR01	MPR02	MPR03
Resistance range	0.22Ω ~ 1MΩ	0.33Ω ~ 1MΩ	0.68Ω ~ 1MΩ
Resistance tolerance	±1%, E24/E96 series; ±5%, E24 series		
Temperature coefficient	≤ 250 ppm/°C		
Maximum dissipation @ 70°C			
R < 1 Ohm	0.6W	1.2W	2W
1 Ohm ≤ R	1W	2W	3W
Maximum permissible voltage	350V	500V	750V
Climatic category	55/155/56		
Stability, R max.			
Load	Δ R±(5.0% +0.10Ω )		
Climatic test	Δ R±(3.0% +0.10Ω )		
Soldering	Δ R±(1.0% +0.05Ω )		
Short time overload	Δ R±(1.0% +0.05Ω )		

MFR reserves the right to make changes in product specification without notice or liability.  
 All information is subject to MFR's own data & is considered accurate at the time of going to print.

## Dimensions :

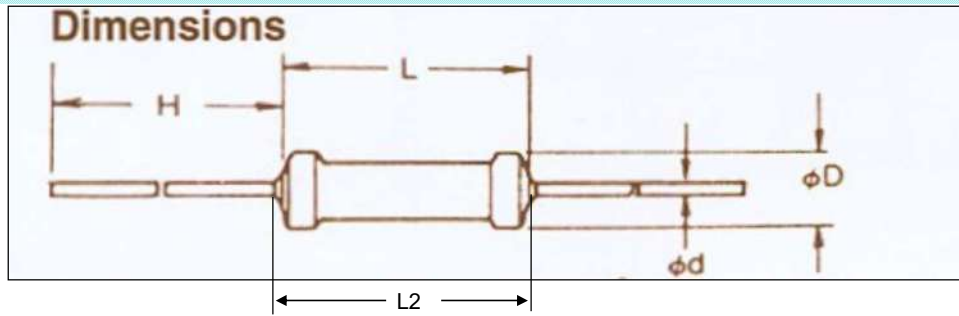

## Physical Data:

### 1.0 GENERAL SERIES SPECIFICATION :

TYPE	WATT. @ 70°C	TOL.	TCR PPM/°C	DIMENSIONS (mm)					RESISTANCE RANGE	MAX. WORKING VOLTAGE	MAX. OVERLOAD VOLTAGE
				L	L2	D	d ± 0.05	H			
MPR01	1W	±1%, ±5%	≤250	6.5 ±0.5	8.5 MAX.	2.5 ±0.5	0.6	28 min	0.22Ω ~ 1MΩ	350V	700 V
MPR02	2W	±1%, ±5%	≤250	10 ±0.5	12.0 MAX.	3.9 ±0.5	0.8	25 min	0.33Ω ~ 1MΩ	500V	1000 V
MPR03	3W	±1%, ±5%	≤250	15 ±1	17.0 MAX.	5.2 ±0.5	0.8	25 min	0.68Ω ~ 1MΩ	750V	1500 V

**Note :** Working voltage is  $\sqrt{P \times R}$  where P is power & R is resistance in Ohms

## Mass Per 100 Units :

TYPE	MASS (g)
MPR01 Cu 0.6mm	21.2 g
MPR02 Cu 0.8mm	50.4 g
MPR03 Cu 0.8mm	119.2 g

## Marking:

The MPR series / type, the nominal resistance & tolerance are marked on the resistor body using four or five coloured bands in accordance with IEC publication 60062 "color codes for fixed resistors"

## Material Specifications:

**Element :** Vacuum-deposited nickel-chrome alloy

**Core :** Fire cleaned high purity ceramic


**End caps :** Steel caps

**Coating :** Red nonflammable lacquer

**Standard Terminals :** Solderable - tinplated copper

## Part Numbering Information:

**Part Number :** Type number, power rating, resistance value, tolerance, tcr.



**Examples:** PART NO. : MPR03, 3W, 47 KOhm, ±1%, 100ppm/°C


### Packing Information:

TYPE	Pcs Per Poly Bag/ Blue box	Pcs Per Brown Box
MPRO1	1,000	5,000
MPRO2	500	1,500
MPRO3	---	1,000


### Performance Data (Procedure & Requirements):

TEST	PROCEDURE	REQUIREMENTS
<b>Robustness Of Termination</b> 1. Tensile Test 2. Bend Test 3. Torsion Test	Load 10 N for 10 sec. Load 5 N 90° , 180° , 90° 3 X 360° in opposite directions	No visual damage No visual damage No visual damage $\Delta R/R$ max.: $\pm(0.50\% + 0.05 \Omega)$
<b>Solderability Test</b>	16 hrs steam or 16 hrs. at 155°C 2 sec. $\pm 0.5$ sec. in solder at 235° $\pm 5^\circ\text{C}$ Using flux	>95% coverage covered (good tinning) & no damage
<b>Resistance To Soldering Heat</b>	at 260°C for 3 sec., 2.5mm from the body	$\Delta R/R$ max.: $\pm(1.0\% + 0.05 \Omega)$
<b>Temperature Cycling</b>	30 minutes at -55°C & 30 minutes at 150°C Total 5 number of cycles.	No visual damage $\Delta R/R$ max.: $\pm(1.0\% + 0.05 \Omega)$
<b>Dry Heat Test</b>	16 hrs at 150°C	$\Delta R/R$ max.: $\pm(1.0\% + 0.05 \Omega)$
<b>Cold Test</b>	2 hrs at -55°C	$\Delta R/R$ max.: $\pm(0.50\% + 0.05 \Omega)$
<b>Short Time Overload</b>	2.5 X Rated voltage for 5 sec. @ 25°C	$\Delta R/R$ max.: $\pm(1.0 + 0.05 \Omega)$
<b>Endurance @ 70°C</b>	2000 hrs. load with Pn (power nominal) 1.5 hr. ON & 0.5 hr. OFF	No visual damage $\Delta R/R$ max.: $\pm(5.0\% + 0.1 \Omega)$
<b>Endurance @ Upper Category Temperature</b>	1000 hrs. at 150°C with no load	No visual damage $\Delta R/R$ max.: $\pm(5.0\% + 0.05 \Omega)$
<b>Temperature Rise Test</b>	Horizontally mounted, loaded with Pn	Hot spot temperature less than maximum body temperature
<b>Damp Heat Steady State</b>	56 days, 40°C; 90 to 95% Rh; dissipation $\leq 0.01Pn$	No visual damage $\Delta R/R$ max.: $\pm(3.0\% + 0.05 \Omega)$
<b>Temperature Coefficient</b>	At 25/-55/25 °C & 25/150/25 °C	Within specified limits
<b>Insulation Resistance</b>	V- Block method for 1 minute duration At 500 V dc	$> 10^3 M\Omega$
<b>Voltage Proof Test</b>	V- Block method for 1 minute duration At 500 V	No flash over or break down should observed
<b>Pulse Load</b>	---	See pulse load capabilities graphs


### Derating Curve:

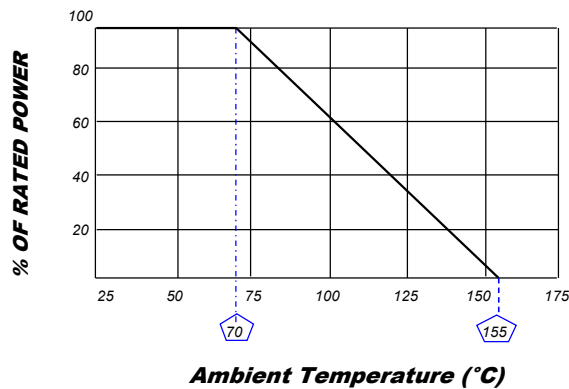


**Pulse load capabilities:**

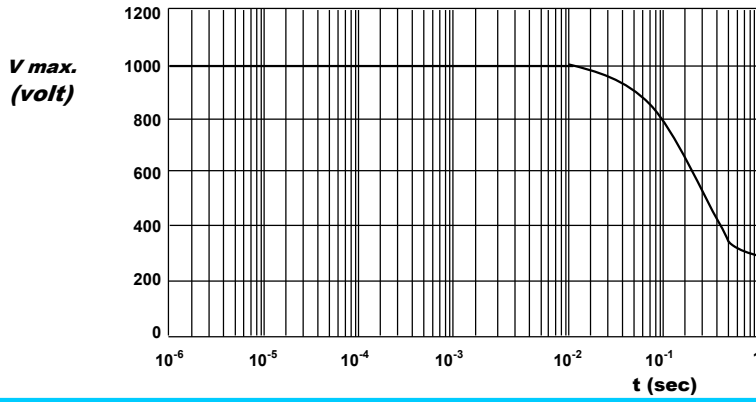

**MPRO1** Pulse on a regular basis: maximum permissible peak pulse voltage (*V max.*) as a function of pulse duration (*t*)

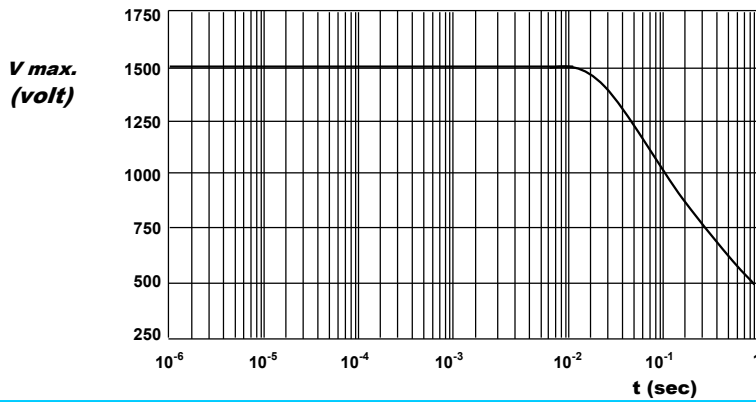

**MPRO2** Pulse on a regular basis: maximum permissible peak pulse voltage (*V max.*) as a function of pulse duration (*t*)

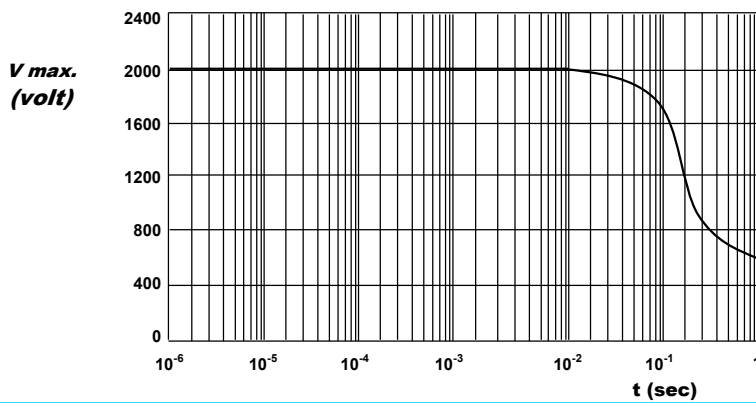

**MPRO3** Pulse on a regular basis: maximum permissible peak pulse voltage (*V max.*) as a function of pulse duration (*t*)

MFR reserves the right to make changes in product specification without notice or liability.

All information is subject to MFR's own data & is considered accurate at the time of going to print.

Document no. : MPR03

Page : 4 of 4

Revision no. : 280828